

Fig. 1

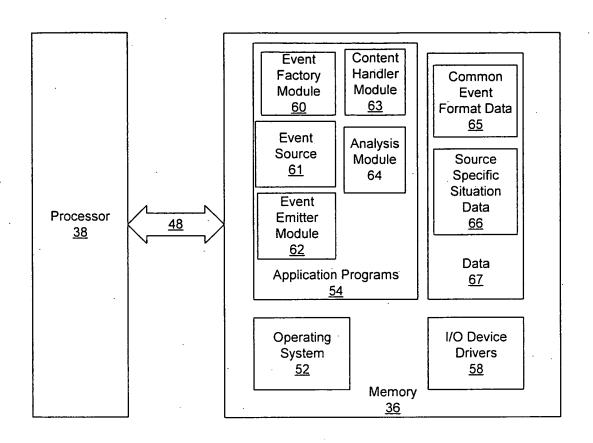


Fig. 2

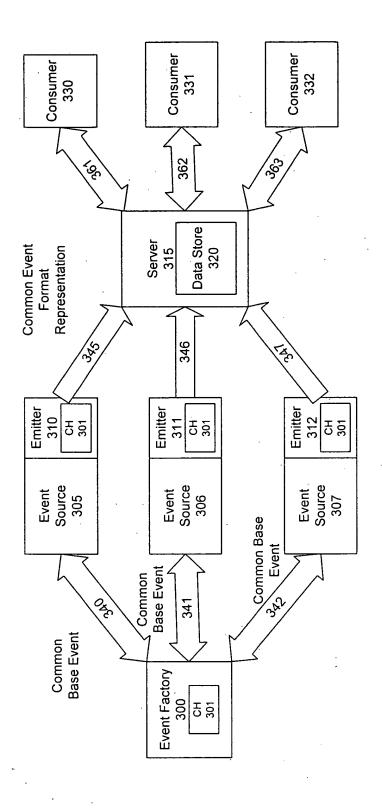


Fig. 3

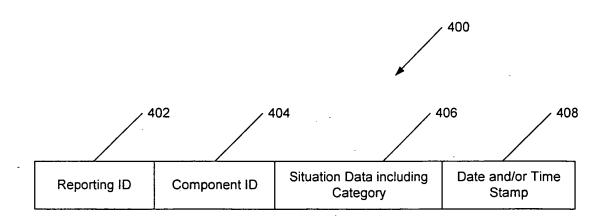
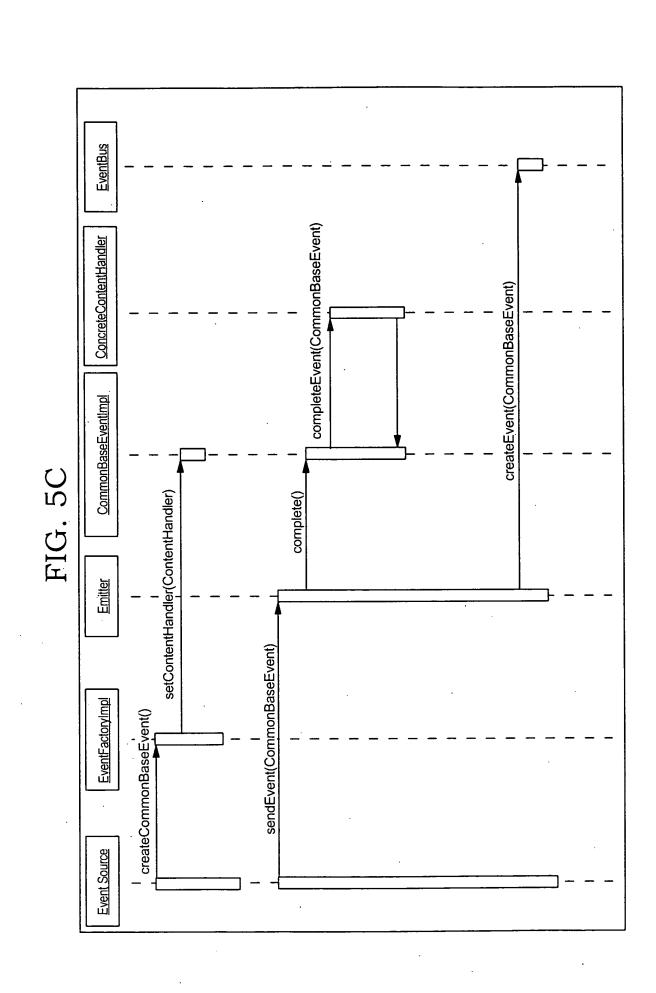


Fig. 4

Reference BinaryRefAddr Reference(String, RefAddr, String, String) BinaryRefAdd(String, byte) Context setCompletionHandler(ContentHandler) getReference() Reference EventFactoryImpl TeventFactoryImpl() bind(Name, Object) EventFactoryFactory | createEventFactory(ContentHandler) ConcreteContentHandler ConcreteContentHandler() **Event Source**

FIG. 5A

EventFactoryImpl setCompletionHandler(ContentHandler) EventFactortyImpl() **EventFactoryFactory** createEventFactory(ContentHandler) **BinaryRefAddr** getContent() **EventFactoryObjectFactory** FIG. 5B getObjectInstance(Object, Name, Context, Hashtable) BinanyRefAddr get(String) EventFactoryObjectFactory() EventFactory Reference getFactoryClassName() Context **EventFactory** lookup(String) **Event Source**



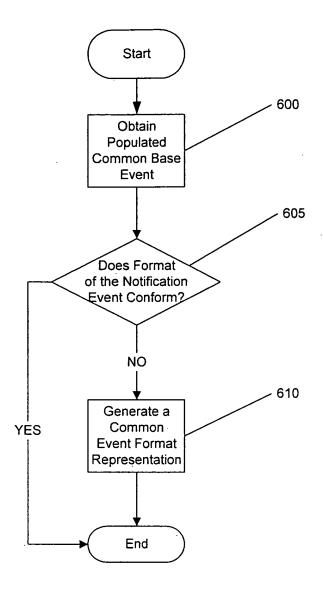


Fig. 6

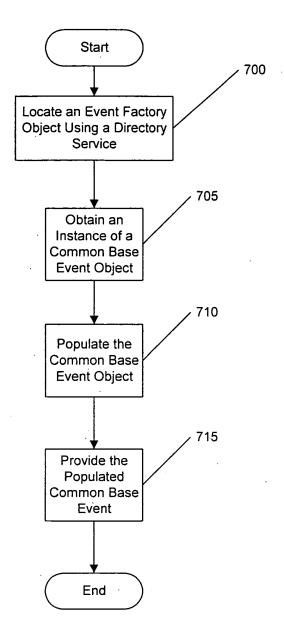


Fig. 7A

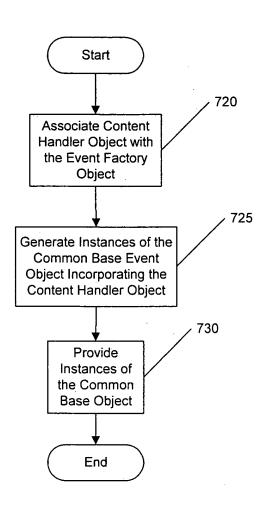


Fig. 7B

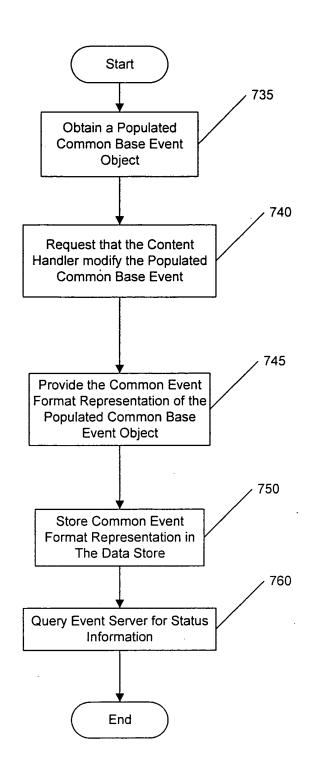


Fig. 7C

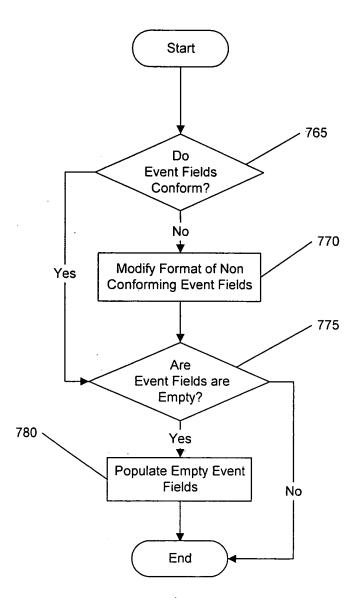


Fig. 7D